

VT6DCC - 038 - 028 - 008 - 1 R 00 - A 1 - 00 - *

Series P1 P2 P3

Cam ring for "P1"
Volumetric displacement cm³/rev (in³/rev)
 * 014/B14 = 47.6 (2.90) 035/B35 = 111.0 (6.77)
 017/B17 = 58.2 (3.55) 038/B38 = 120.3 (7.34)
 020/B20 = 66.0 (4.03) 042/B42 = 136.0 (8.30)
 024/B24 = 79.5 (4.85) 045/B45 = 145.7 (8.89)
 028/B28 = 89.7 (5.47) 050/B50 = 158.0 (9.64)
 031/B31 = 98.3 (6.00) 061/B61 = 190.5 (11.62)

***'0' - Uni - directional 'B' - Bi - directional**

Cam ring for "P2" & "P3"
Volumetric displacement cm³/rev (in³/rev)
 * 003/B03 = 10.8 (0.66) 015/B15 = 50.5 (3.08)
 005/B05 = 17.2 (1.05) 017/B17 = 58.3 (3.56)
 006/B06 = 21.3 (1.30) 020/B20 = 63.8 (3.89)
 008/B08 = 26.4 (1.61) 022/B22 = 70.3 (4.29)
 010/B10 = 34.1 (2.08) 025/B25 = 79.3 (4.84)
 012/B12 = 37.1 (2.26) 028/B28 = 88.8 (5.42)
 014/B14 = 46.0 (2.81) 031/B31 = 100.0 (6.10)

*** '0' - Uni - directional 'B' - Bi - directional**

Modifications

Mounting w/connection variables

SAE	P1 = 1¼" S = 4" P2 = 1"			
	UNC		Metric	
P3	1"	3/4"	1"	3/4"
Code	00	01	M0	M1

Seal class
 1 - S1 (for mineral oil)
 4 - S4 (for fire resistant fluids)
 5 - S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4,5)
 00 = Standard

Direction of rotation (view on shaft end)
 R - Clockwise
 L - Counter - clockwise

Type of Shaft
 1 - Keyed (no SAE)
 2 - Keyed (SAE CC)
 3 - Splined (SAE C)
 4 - Splined (SAE CC)
 6 - Splined (no SAE)

TP

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)


Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1500 rpm						Input power p & n = 1500 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)	
		in ³ /rev	cm ³ /rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	014	2.90	47.6	18.88	71.4	16.42	62.1	14.78	55.9	3.08	2.3	24.81	18.5	41.03	30.6
	017	3.55	58.2	23.1	87.3	20.6	78.0	18.99	71.8	3.35	2.5	29.77	22.2	49.62	37.0
	020	4.00	66.0	26.19	99.0	23.73	89.7	22.08	83.5	3.75	2.8	33.39	24.9	55.92	41.7
	024	4.80	79.5	31.56	119.3	29.10	110.0	27.46	103.8	4.02	3.0	39.69	29.6	66.78	49.8
	028	5.50	89.7	35.58	134.5	33.12	125.2	31.48	119.0	4.29	3.2	44.52	33.2	74.96	55.9
	031	6.00	98.3	39.00	147.5	36.53	138.1	34.89	131.9	4.42	3.3	48.54	36.2	81.80	61.0
	035	6.80	111.0	44.04	166.5	41.58	157.2	39.94	151.0	4.69	3.5	54.58	40.7	92.13	68.7
	038	7.30	120.3	47.72	180.4	45.26	171.1	43.62	164.9	4.96	3.7	58.87	43.9	99.64	74.3
	042 ¹⁾	8.30	136.0	53.96	204.0	51.50	194.7	49.86	188.5	5.36	4.0	66.25	49.4	112.24	83.7
	045 ¹⁾	8.89	145.7	57.80	218.5	55.34	209.2	53.70	203.0	5.50	4.1	70.81	52.8	120.02	89.5
	050 ^{1,2)}	9.64	158.0	62.69	237.0	60.23	227.7	59.25	224.0	5.90	4.4	76.44	57.0	113.98	85.0
	061 ^{1,3)}	11.62	190.5	76.25	285.7	73.54	278.0	--	--	6.16	4.6	81.26	60.6	--	--
P2 & P3	003	0.66	10.8	4.29	16.2	2.96	11.2	2.04	7.7	1.74	1.3	7.11	5.3	11.22	8.4
	005	1.05	17.2	6.83	25.8	5.50	20.8	4.57	17.3	1.88	1.4	10.06	7.5	16.36	12.2
	006	1.30	21.3	8.44	31.9	7.11	26.9	6.19	23.4	2.01	1.5	11.94	8.9	19.71	14.7
	008	1.61	26.4	10.48	39.6	9.15	34.6	8.22	31.1	2.15	1.6	14.35	10.7	22.93	17.7
	010	2.08	34.1	13.52	51.1	12.19	46.1	11.26	42.6	2.28	1.7	18.64	13.4	29.90	22.3
	012	2.26	37.1	14.71	55.6	13.36	50.6	12.46	47.1	2.28	1.7	19.31	14.4	32.32	24.1
	014	2.81	46.0	18.25	69.0	16.93	64.0	16.00	60.5	2.55	1.9	23.60	17.6	39.56	29.5
	015	3.08	50.5	20.00	75.6	18.73	73.2	19.02	67.5	2.68	2.0	25.61	19.1	42.91	32.0
	017	3.56	58.3	23.12	87.4	21.79	82.4	20.87	78.9	2.82	2.1	29.37	21.9	49.48	36.9
	020	3.89	63.8	25.32	95.7	23.99	90.7	23.07	87.2	2.95	2.2	31.92	23.8	53.91	40.2
	022	4.29	70.3	27.88	105.4	26.56	100.4	25.63	96.9	3.08	2.3	35.00	26.1	59.14	44.1
	025	4.84	79.3	31.46	118.9	30.13	113.9	29.21	110.4	3.35	2.5	39.16	29.2	66.38	49.5
	028 ²⁾	5.42	88.8	35.24	133.2	33.92	128.2	33.28	125.8	3.75	2.8	43.85	32.7	65.04	48.5
	031 ²⁾	6.10	100.0	39.68	150.0	38.35	145.0	37.72	142.6	3.75	2.8	48.95	36.5	72.95	54.4

1) 042-045-050-061 = 2200 RPM max.

2) 028-031- 050 = 210 bar (3000 psi) max. int.


3) 061 = 120 bar (1740 psi) max. int, 061 = 80 bar (1160 psi) cont.

INTERNAL LEAKAGE (TYPICAL)

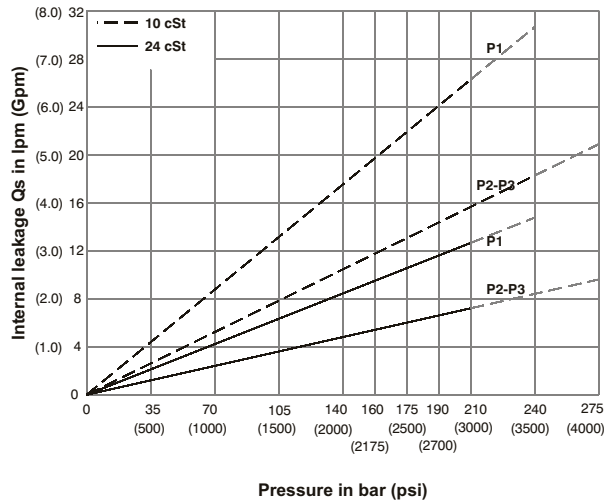


Total leakage is the sum of each section loss at its operating conditions.

NOISE LEVEL (TYPICAL)

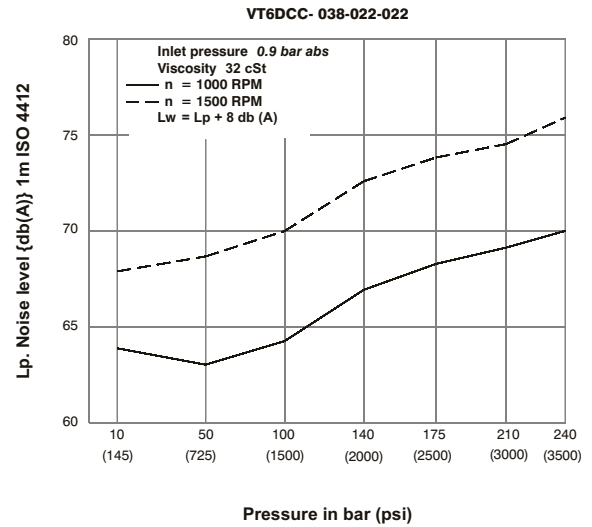


Triple pump noise level is given with each section discharging at the pressure noted on the curve.




HYDROMECAHNICAL POWER LOSS (TYPICAL)

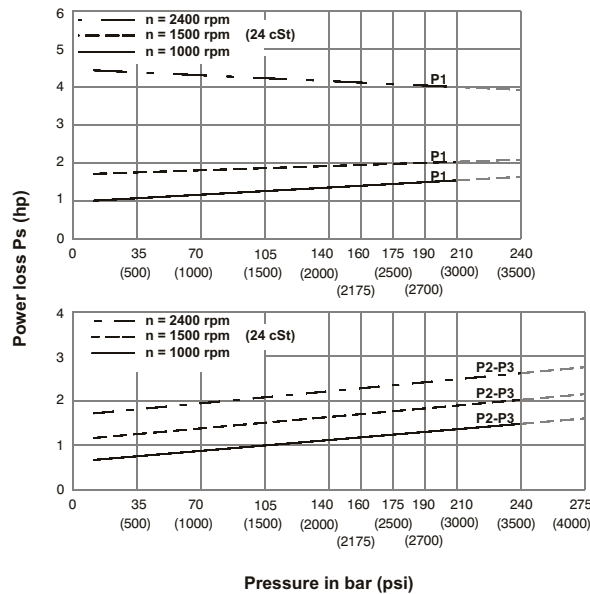

Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

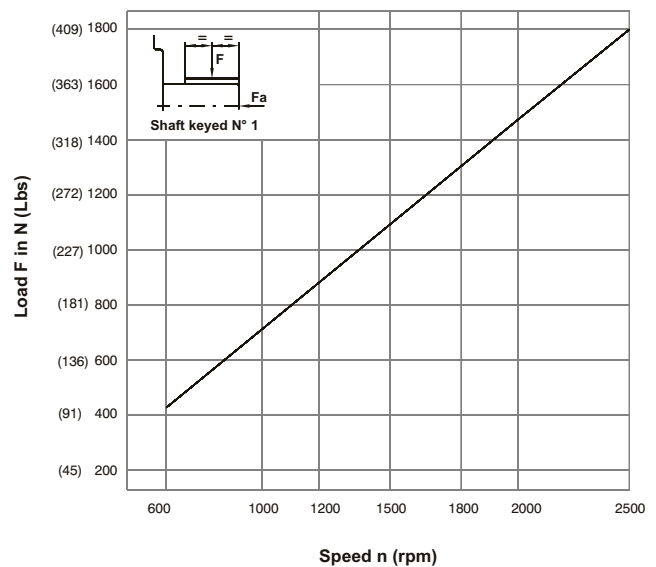

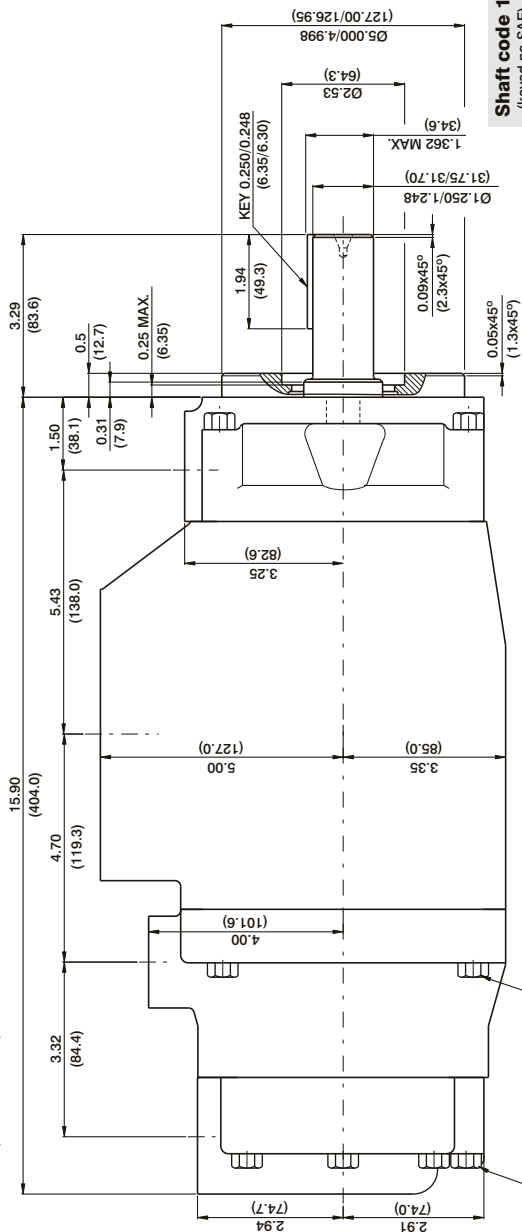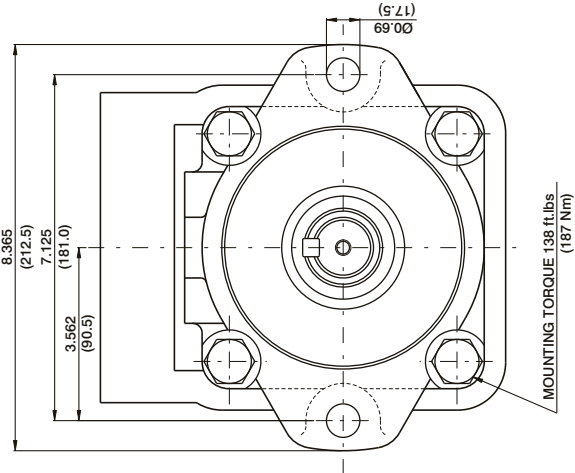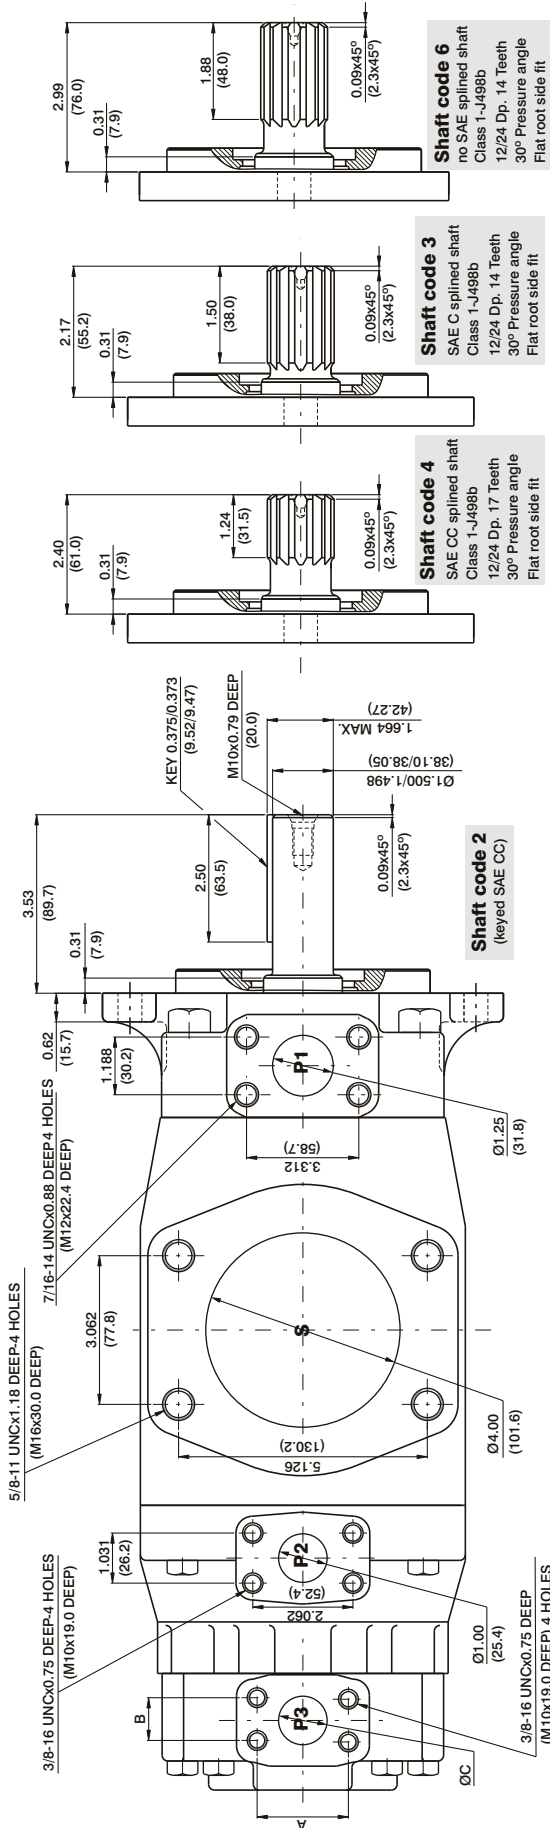

Shaft	Vp x p max. (P1 + P2 + P3)
1	38299 (43240)
2	58901 (66500)
3	54027 (61200)
4	58901 (66500)

PORT	CODE	A	B	C
P3	00 & M0	2.06 (52.4)	1.03 (26.2)	1.00 (25.4)
	01 & M1	1.874 (47.6)	0.874 (22.2)	0.75 (19.05)

Series **VT6EDC* - 062 - 035 - 017 - 1 R 00 - C 1 - P - 0 - ***

* = S for SAE Mtg. Flange

Cam ring for "P1"Volumetric displacement cm³/rev (in³/rev)

042 = 132.3 (8.07)	062 = 196.7 (12.00)
045 = 142.4 (8.69)	066 = 213.3 (13.02)
050 = 158.5 (9.67)	072 = 227.1 (13.86)
052 = 164.8 (10.06)	085 = 269.8 (16.46)
057 = 180.7 (11.02)	

Cam ring for "P2"Volumetric displacement cm³/rev (in³/rev)

* B14/R14 = 47.6 (2.90)	B35/R35 = 110.0 (6.77)
B17/R17 = 58.2 (3.55)	B38/R38 = 120.3 (7.34)
B20/R20 = 66.0 (4.03)	B42/R42 = 136.0 (8.30)
B24/R24 = 79.5 (4.85)	B45/R45 = 145.7 (8.80)
B28/R28 = 89.7 (5.47)	B50/R50 = 158.0 (9.64)
B31/R31 = 98.3 (6.00)	B61/R61 = 190.5 (11.62)

* 'B' - for Mobile 'R' - for Mobile - spring assisted

Cam ring for "P3"Volumetric displacement cm³/rev (in³/rev)

* B03/R03 = 10.8 (0.66)	B15/R15 = 50.5 (3.08)
B05/R05 = 17.2 (1.05)	B17/R17 = 58.3 (3.56)
B06/R06 = 21.3 (1.30)	B20/R20 = 63.8 (3.89)
B08/R08 = 26.4 (1.61)	B22/R22 = 70.3 (4.29)
B10/R10 = 34.1 (2.08)	B25/R25 = 79.3 (4.84)
B12/R12 = 37.1 (2.26)	B28/R28 = 88.8 (5.42)
B14/R14 = 46.0 (2.81)	B31/R31 = 100.0 (6.10)

* 'B' - for Mobile 'R' - for Mobile - spring assisted

Modifications**Mounting w/connection variables**

0 = P3 = 1" SAE

1 = P3 = 3/4" SAE

Mounting (pump)

P= Pedestal mounting

F= Face mounting

Seal class

1 - S1 (for mineral oil)

4 - S4 (for fire resistant fluids)

5 - S5 (for mineral oil and fire resistant fluids)

Design letter**Porting combination (see page CI-1-4,5)**

00 = Standard

Direction of rotation

(view on shaft end)

R - Clockwise

L - Counter - clockwise

Type of Shaft

1 - Keyed (G45N-ISO 3019-2) (VT6EDC)

3 - Splined (SAE D&E) (VT6EDC & VT6EDCS)


2 - Keyed (SAE D&E) (VT6EDCS)

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1500 rpm						Input power p & n = 1500 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)	
		in ³ /rev	cm ³ /rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	042	8.07	132.3	52.50	198.5	49.87	188.5	47.96	181.3	6.97	5.2	66.25	49.4	110.77	82.6
	045	8.70	142.4	56.51	213.6	53.86	203.6	51.98	196.5	7.24	5.4	70.94	52.9	118.95	88.7
	050	9.67	158.5	62.88	237.7	60.24	227.7	58.36	220.6	7.64	5.7	78.45	58.5	131.82	98.3
	052	10.00	164.8	65.40	247.2	62.75	237.2	60.87	230.1	7.78	5.8	81.53	60.8	136.92	102.1
	057	11.02	180.7	71.71	271.1	69.07	261.1	67.19	254.0	8.18	6.1	89.04	66.4	143.35	106.9
	062	12.00	196.7	78.04	295.0	75.40	285.0	73.52	277.9	8.58	6.4	96.42	71.9	162.67	121.3
	066	13.00	213.3	84.63	319.9	81.98	309.9	80.11	302.8	8.98	6.7	104.20	77.7	175.94	131.2
	072	13.86	227.1	90.11	340.6	87.46	330.6	85.58	323.5	9.25	6.9	110.77	82.6	187.07	139.5
	085 ^{1,2)}	16.40	269.8	107.00	404.7	105.21	397.7	--	--	9.78	7.3	87.56	65.3	--	--
P2	B14	2.90	47.6	18.88	71.4	16.42	62.1	14.78	55.9	3.08	2.3	24.81	18.5	41.03	30.6
	B17	3.55	58.2	23.1	87.3	20.6	78.0	18.99	71.8	3.35	2.5	29.77	22.2	49.62	37.0
	B20	4.00	66.0	26.19	99.0	23.73	89.7	22.08	83.5	3.75	2.8	33.39	24.9	55.92	41.7
	B24	4.80	79.5	31.56	119.3	29.10	110.0	27.46	103.8	4.02	3.0	39.69	29.6	66.78	49.8
	B28	5.50	89.7	35.58	134.5	33.12	125.2	31.48	119.0	4.29	3.2	44.52	33.2	74.96	55.9
	B31	6.00	98.3	39.00	147.5	36.53	138.1	34.89	131.9	4.42	3.3	48.54	36.2	81.80	61.0
	B35	6.80	111.0	44.04	166.5	41.58	157.2	39.94	151.0	4.69	3.5	54.58	40.7	92.13	68.7
	B38	7.30	120.3	47.72	180.4	45.26	171.1	43.62	164.9	4.96	3.7	58.87	43.9	99.64	74.3
	B42 ³⁾	8.30	136.0	53.96	204.0	51.50	194.7	49.86	188.5	5.36	4.0	66.25	49.4	112.24	83.7
	B45 ³⁾	8.89	145.7	57.80	218.5	55.34	209.2	53.70	203.0	5.50	4.1	70.81	52.8	120.02	89.5
	B50 ^{3,4)}	9.64	158.0	62.69	237.0	60.23	227.7	59.25	224.0	5.90	4.4	76.44	57.0	113.98	85.0
P3	B61 ^{3,5)}	11.62	190.5	76.25	285.7	73.54	278.0	--	--	6.16	4.6	81.26	60.6	--	--
	B03	0.66	10.8	4.29	16.2	2.83	10.7	--	--	1.74	1.3	7.11	5.3	--	--
	B05	1.05	17.2	6.83	25.8	5.37	20.3	4.17	15.8	1.88	1.4	10.06	7.5	16.36	12.2
	B06	1.30	21.3	8.44	31.9	7.01	26.5	5.82	22.0	2.01	1.5	11.94	8.9	19.71	14.7
	B08	1.61	26.4	10.48	39.6	9.02	34.1	7.83	29.6	2.15	1.6	14.35	10.7	22.93	17.7
	B10	2.08	34.1	13.52	51.1	12.08	45.7	10.89	41.2	2.28	1.7	18.64	13.4	29.90	22.3
	B12	2.26	37.1	14.71	55.6	13.28	50.2	12.08	45.7	2.28	1.7	19.31	14.4	32.32	24.1
	B14	2.81	46.0	18.25	69.0	16.79	63.5	15.60	59.0	2.55	1.9	23.60	17.6	39.56	29.5
	B15	3.08	50.5	20.00	75.6	18.62	70.4	17.46	66.0	2.68	2.0	25.61	19.1	42.91	32.0
	B17	3.56	58.3	23.12	87.4	21.69	82.0	20.50	77.5	2.82	2.1	29.37	21.9	49.48	36.9
	B20	3.89	63.8	25.32	95.7	23.86	90.2	22.67	85.7	2.95	2.2	31.92	23.8	53.91	40.2
	B22	4.29	70.3	27.88	105.4	26.45	100.0	25.26	95.5	3.08	2.3	35.00	26.1	59.14	44.1
	B25	4.84	79.3	31.46	118.9	30.02	113.5	28.83	109.0	3.35	2.5	39.16	29.2	66.38	49.5
	B28 ⁶⁾	5.42	88.8	35.24	133.2	33.78	127.7	32.93	124.5	3.75	2.8	43.85	32.7	65.04	48.5
	B31 ⁶⁾	6.10	100.0	39.68	150.0	38.22	144.5	37.38	141.3	3.75	2.8	48.95	36.5	72.95	54.4


1) 085 = 2000 RPM max. 2) 085 = 75 bar (1100 psi) cont. & 085 = 90 bar (1300 psi) max. int. 3) B42-B45-B50-B61=2200 RPM max. 4) B28-B31-B50=210 bar (3000 psi) max. int.
 5) B61 = 120 bar (1740 psi) max. int. B61 = 80 bar (1160 psi) cont. -- Not to use because internal leakage greater than 50% theoretical flow

INTERNAL LEAKAGE (TYPICAL)

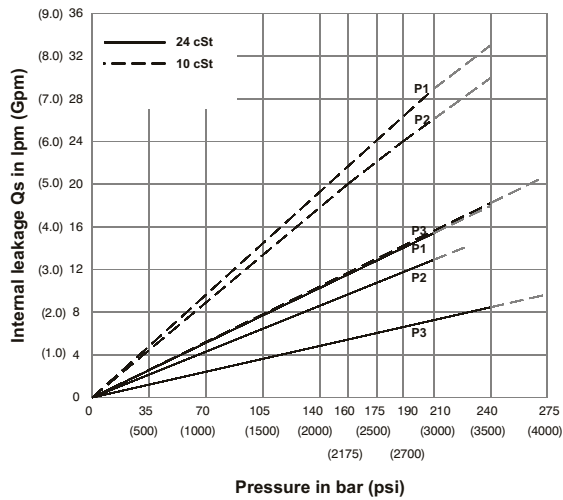


Total leakage is the sum of each section loss at its operating conditions.

NOISE LEVEL (TYPICAL)

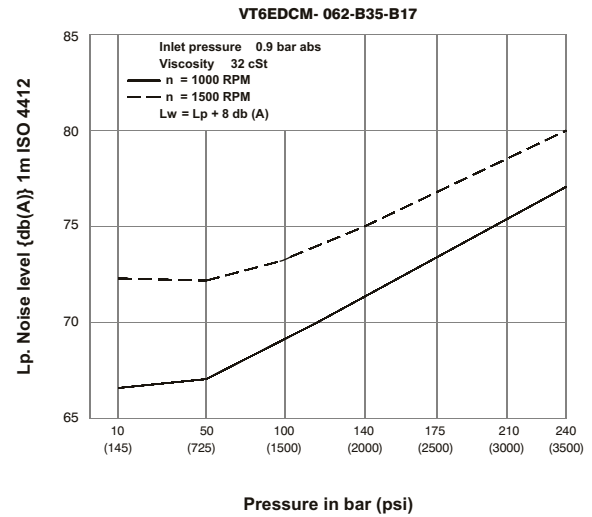


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECHANICAL POWER LOSS (TYPICAL)

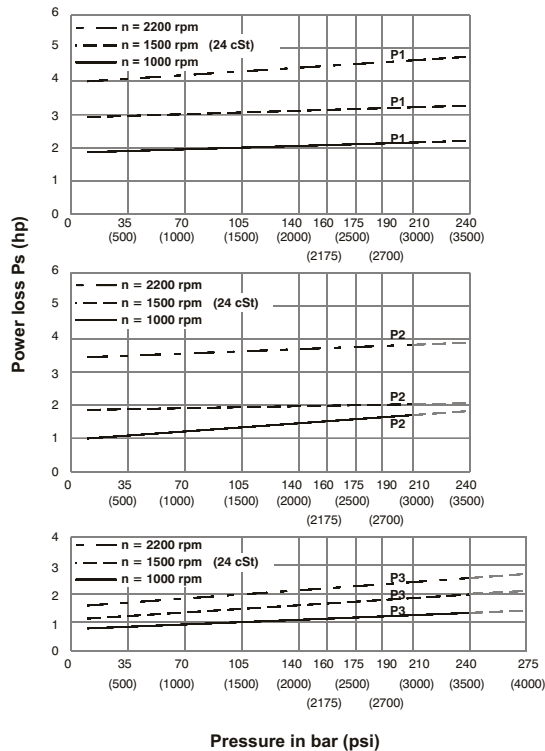


Total hydromechanical power loss is the sum of each section at its operating conditions

PERMISSIBLE RADIAL LOAD

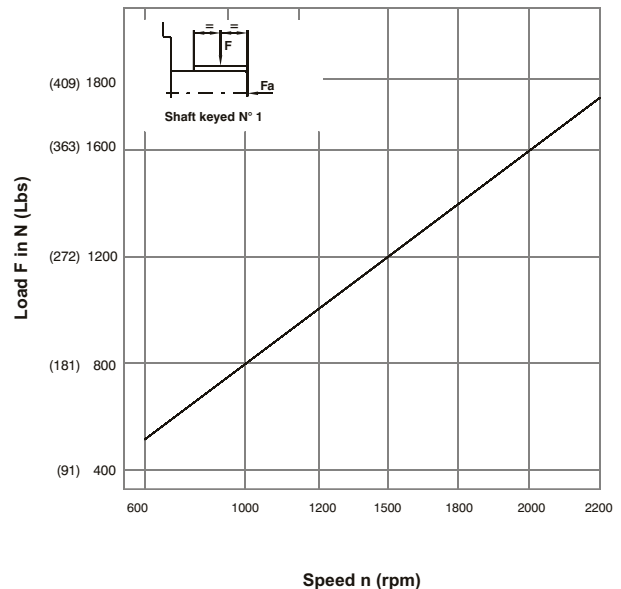

Maximum axial load permissible $F_a = 2000$ N (449 lbs)

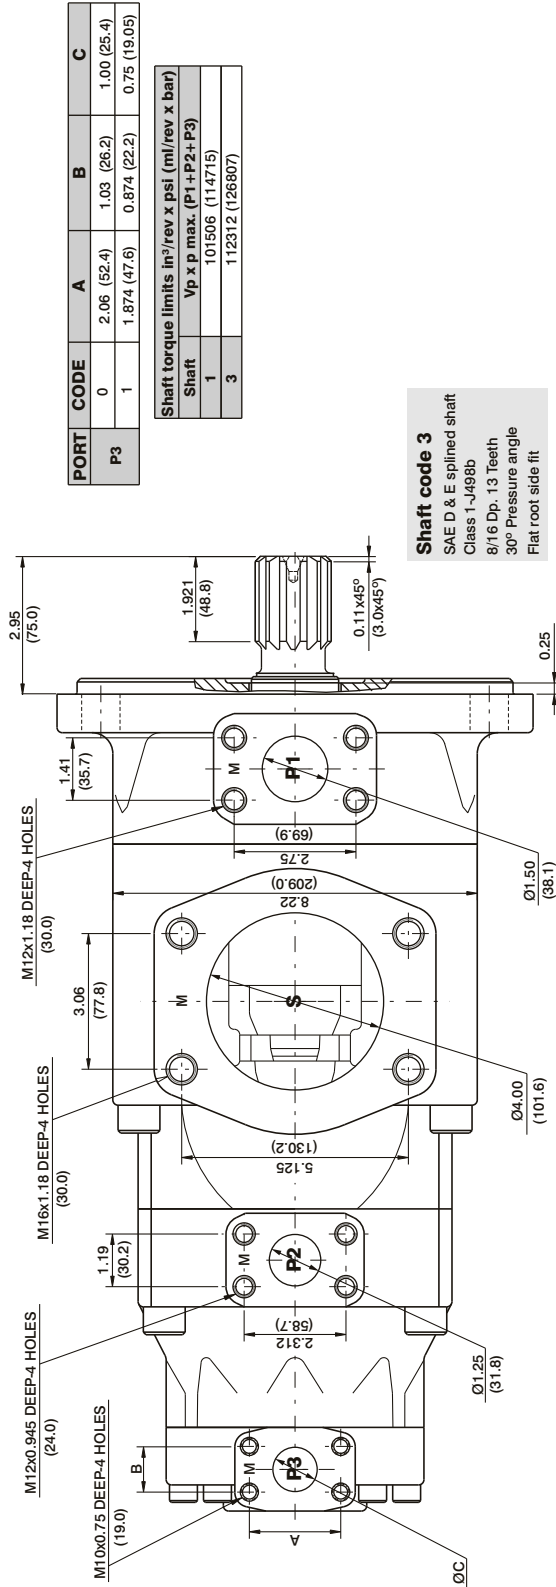


Shaft code 3

SAE D & E splined shaft
Class 1-498b
8/16 Dp, 13 Teeth
30° Pressure angle
Flat root side fit

Shaft torque limits in³/rev x psi (ml/rev x bar)

Shaft	Vp x p max. (P1 + P2 + P3)
1	101506 (114715)
3	112312 (126807)

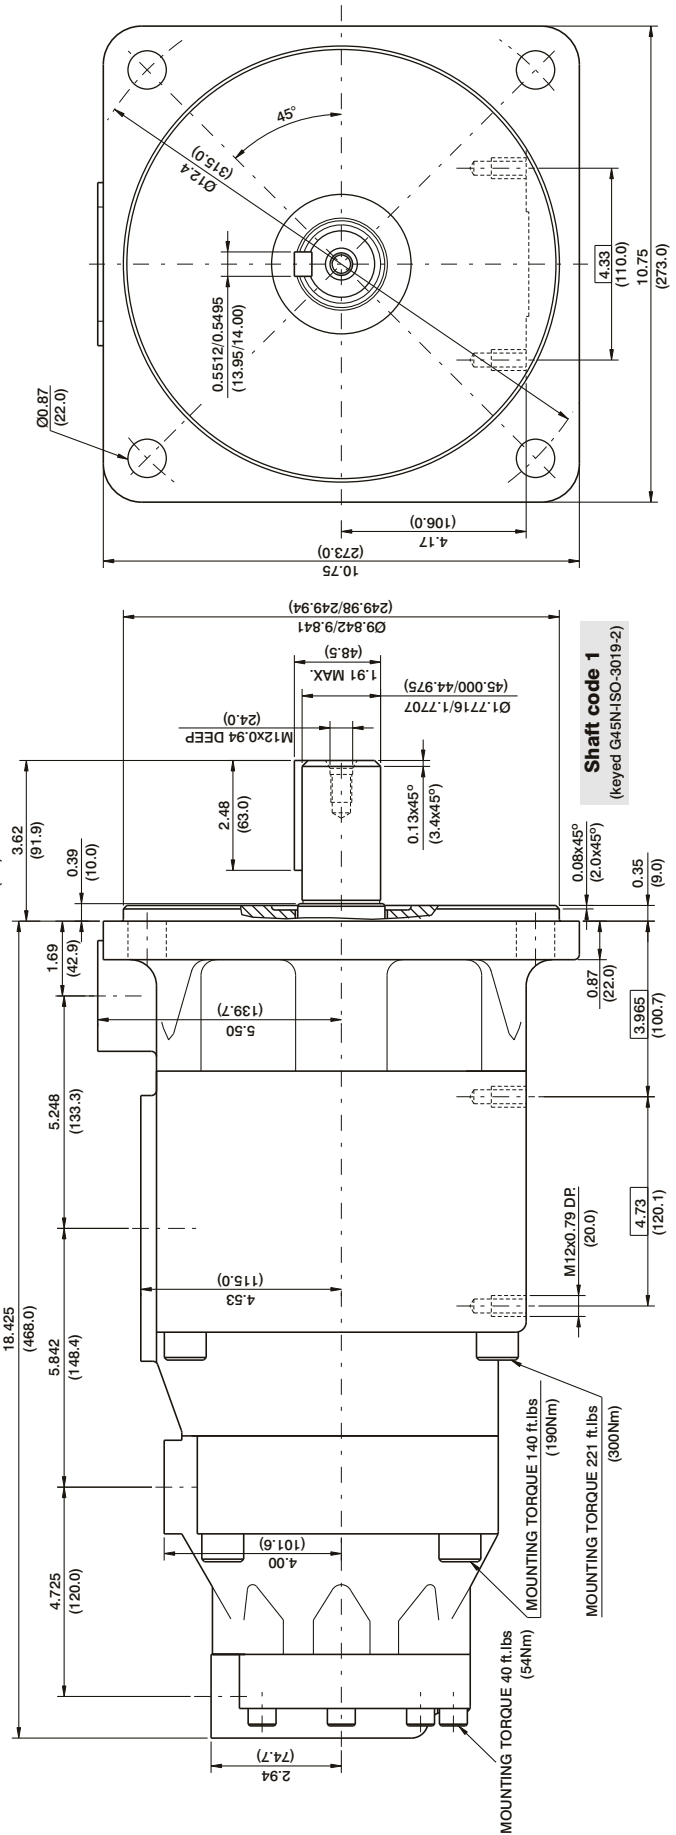

Shaft code 1

(keyed G45N-ISO-3019-2)

MOUNTING TORQUE 40 ft.lbs (54Nm)
MOUNTING TORQUE 140 ft.lbs (190Nm)
MOUNTING TORQUE 221 ft.lbs (300Nm)

VT67DCB - 038 - 028 - B10 - 1 R 00 - A 1 - M1 - *

Series- SAE C 2 bolts
Mounting flange J744c

Cam ring for "P1"

Volumetric displacement cm³/rev (in³/rev)

*014/B14 = 47.6 (2.90)	035/B35 = 111.0 (6.77)
017/B17 = 58.2 (3.55)	038/B38 = 120.3 (7.34)
020/B20 = 66.0 (4.03)	042/B42 = 136.0 (8.30)
024/B24 = 79.5 (4.85)	045/B45 = 145.7 (8.89)
028/B28 = 89.7 (5.47)	050/B50 = 158.0 (9.64)
031/B31 = 98.3 (6.00)	061/B61 = 190.5 (11.62)

*'0' - Uni - directional 'B' - Bi - directional

Cam ring for "P2"

Volumetric displacement cm³/rev (in³/rev)

*003/B03 = 10.8 (0.66)	015/B15 = 50.5 (3.08)
005/B05 = 17.2 (1.05)	017/B17 = 58.3 (3.56)
006/B06 = 21.3 (1.30)	020/B20 = 63.8 (3.89)
008/B08 = 26.4 (1.61)	022/B22 = 70.3 (4.29)
010/B10 = 34.1 (2.08)	025/B25 = 79.3 (4.84)
012/B12 = 37.1 (2.26)	028/B28 = 88.8 (5.42)
014/B14 = 46.0 (2.81)	031/B31 = 100.0 (6.10)

*'0' - Uni - directional 'B' - Bi - directional

Cam ring for "P3"

Volumetric displacement cm³/rev (in³/rev)

B02 = 5.7 (0.35)	B08 = 24.9 (1.52)	B12 = 40.9 (2.50)
B03 = 9.8 (0.60)	B07 = 22.5 (1.37)	B14 = 45.1 (2.75)
B04 = 12.8 (0.78)	B09 = 28.0 (1.71)	B15 = 50.0 (3.05)
B05 = 15.9 (0.97)	B10 = 31.8 (1.94)	
B06 = 19.8 (1.21)	B11 = 34.9 (2.13)	

Modifications**Mounting w/connection variables**

P1=1¼"	P2=1"	P3=¾"	S=4"
UNC	METRIC		
01	M1		

Seal class

- 1 - S1 (for mineral oil)
- 4 - S4 (for fire resistant fluids)
- 5 - S5 (for mineral oil and fire resistant fluids)

Design letter**Porting combination (see page CI-1-4,5)**

00 = Standard

Direction of rotation (view on shaft end)

- R - Clockwise
- L - Counter - clockwise

Type of Shaft

- 1 - Keyed (no SAE)
- 2 - Keyed (SAE CC)
- 3 - Splined (SAE C)
- 4 - Splined (SAE CC)

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)


Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1800 rpm						Input power p & n = 1800 rpm					
		in ³ /rev	cm ³ /rev	P=0bar(0 psi)		P=140bar(2000psi)		P=240bar(3500 psi)		P=7bar(100psi)		P=140bar(2000psi)		P=240bar(3500 psi)	
				gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	014	2.90	47.6	22.64	85.0	20.46	77.4	18.8	71.1	4.02	2.99	29.31	21.85	49.34	36.79
	017	3.55	58.2	23.1	87.3	20.6	78.0	18.99	71.8	3.35	2.50	29.77	22.2	49.62	37.0
	020	4.03	66.0	31.39	118.6	29.29	101.4	27.57	104.2	4.53	3.38	39.52	29.47	67.21	50.11
	024	4.85	79.5	37.81	142.8	35.63	134.6	33.99	128.5	4.91	3.66	47.02	35.06	80.32	59.89
	028	5.47	89.7	42.66	161.3	40.48	153.0	38.84	146.8	5.19	3.87	52.68	39.28	90.23	67.28
	031	6.00	98.3	46.75	176.7	44.57	168.5	42.93	162.3	5.43	4.09	57.45	42.84	98.58	73.51
	035	6.77	111.0	52.79	199.6	50.61	191.3	48.97	184.1	5.78	4.31	64.50	48.09	110.91	82.70
	038	7.34	120.3	57.21	216.3	55.03	208.1	53.39	201.8	6.04	4.50	69.66	51.94	111.94	83.47
	042 ¹⁾	8.30	136.0	64.68	244.5	62.50	236.3	60.86	230.1	6.47	4.83	78.37	58.44	135.19	100.81
	045 ¹⁾	8.89	145.7	69.29	261.9	67.11	253.7	65.47	247.5	6.74	5.02	83.75	62.45	144.61	107.83
	050 ^{1,2)}	9.64	158.0	75.14	284.1	72.96	275.8	71.78	271.3	7.08	5.27	90.58	67.54	154.54	100.32
P2	061 ^{1,3)}	11.62	190.5	75.6	285.8	73.54	278.0	--	--	7.37	5.50	97.49	72.69	--	--
				P=0bar(0 psi)		P=140bar(2000psi)		P=275bar(4000 psi)		P=7bar(100psi)		P=140bar(2000psi)		P=275bar(4000 psi)	
	003	0.66	10.8	5.14	19.6	3.85	14.6	--	--	2.11	1.57	8.45	6.30	--	--
	005	1.05	17.2	8.18	30.9	6.89	26.0	5.68	21.5	2.29	1.70	12.00	8.94	19.81	14.77
	006	1.30	21.3	10.13	38.3	8.84	33.4	7.63	28.8	2.40	1.78	14.28	10.64	23.79	17.74
	008	1.61	26.4	12.55	47.4	11.26	42.6	10.05	37.9	2.54	1.89	17.11	12.75	28.75	21.43
	010	2.08	34.1	16.22	61.3	14.93	56.4	13.71	51.8	2.76	2.06	21.38	15.94	36.22	27.00
	012	2.26	37.1	17.64	66.7	16.35	61.8	15.14	57.2	2.84	2.11	23.05	17.18	39.14	29.18
	014	2.81	46.0	21.88	82.7	20.59	77.8	19.37	73.2	3.09	2.30	27.99	20.87	47.78	35.62
	015	3.08	50.5	23.99	90.7	22.83	86.3	21.56	81.5	3.21	2.40	30.30	22.60	51.36	38.30
	017	3.56	58.3	27.73	104.8	26.44	99.9	25.22	95.3	3.43	2.55	34.81	25.95	59.73	44.54
P3	020	3.89	63.8	30.34	114.7	29.05	109.8	27.84	105.2	3.58	2.66	37.86	28.23	65.07	48.52
	022 ⁵⁾	4.29	70.3	33.43	126.4	32.14	121.5	30.93	116.9	3.76	2.80	41.47	30.92	71.38	53.22
	025 ^{4,6)}	4.84	79.3	37.71	142.5	36.42	137.6	35.21	133.1	4.01	2.99	46.46	34.64	80.12	59.74
	028 ^{4,7)}	5.42	88.8	42.23	159.6	40.94	154.7	40.32	152.4	4.27	3.18	51.74	38.58	76.73	57.22
	031 ^{4,7)}	6.10	100.0	47.56	179.7	46.27	174.9	45.65	172.5	4.58	3.41	57.95	43.21	86.06	64.17
				P=0bar(0 psi)		P=140bar(2000psi)		P=300bar(4350 psi)		P=7bar(100psi)		P=140bar(2000psi)		P=300bar(4350 psi)	
	B02	0.35	5.7	2.76	10.4	2.33	8.8	1.80	6.8	0.74	0.55	4.02	2.99	8.10	6.40
	B03	0.60	9.8	4.66	17.6	4.23	15.9	3.70	14.0	0.85	0.63	6.24	4.65	12.93	10.25
	B04	0.78	12.8	6.09	23.0	5.66	21.4	5.13	19.4	0.94	0.70	7.90	5.89	16.55	13.13
	B05	0.97	15.9	7.56	28.6	7.13	26.9	6.60	25.0	1.02	0.76	9.62	7.17	20.29	16.12
	B06	1.21	19.8	9.42	35.6	8.99	33.9	8.46	32.0	1.13	0.84	11.79	8.79	25.00	19.88
	B07	1.37	22.5	10.70	40.4	10.27	38.8	9.74	36.8	1.20	0.89	13.29	9.91	28.26	22.47
	B08	1.52	24.9	11.84	44.7	11.41	43.1	10.88	41.1	1.27	0.94	14.62	10.90	31.15	24.78
	B09	1.71	28.0	13.31	50.3	12.87	48.6	12.35	47.0	1.36	1.01	16.35	12.19	34.92	27.77
	B10	1.94	31.8	15.12	57.2	14.69	55.5	14.16	53.5	1.46	1.11	18.45	13.75	39.48	31.42
	B11 ⁸⁾	2.13	34.9	16.64	62.9	16.19	61.2	15.68	59.3	1.55	1.15	20.17	15.04	43.22	32.22
	B12 ⁸⁾	2.50	40.9	19.50	73.7	19.07	72.1	18.54	70.1	1.72	1.28	23.55	17.56	50.58	37.71
	B14 ⁸⁾	2.75	45.1	21.40	80.8	20.95	79.2	20.44	77.0	1.83	1.36	25.80	19.23	55.48	41.37
	B15 ⁸⁾	3.05	50.0	23.78	89.8	23.35	88.3	22.88	86.5	1.97	1.47	28.55	21.28	57.35	42.76

1) 042-045-050-061=2200 RPM max. 2) 050=210 bar (3000 psi) max. int. 3) 061 = 120 bar (1740 psi) max. int. 061 = 80 bar (1160 psi) cont. 4) 025-028-031 = 2500 R.P.M. max.

5) 022= 275 bar max. int. 6) 025 = 240 bar max. int. 7) 028-031 = 210 bar (3000 psi) max. int.


8) B11-B12-B14 = 300 bar (4350 psi) & B15 = 280 bar (4060 psi) max. int. And Max. Speed = 3000 rpm

INTERNAL LEAKAGE (TYPICAL)

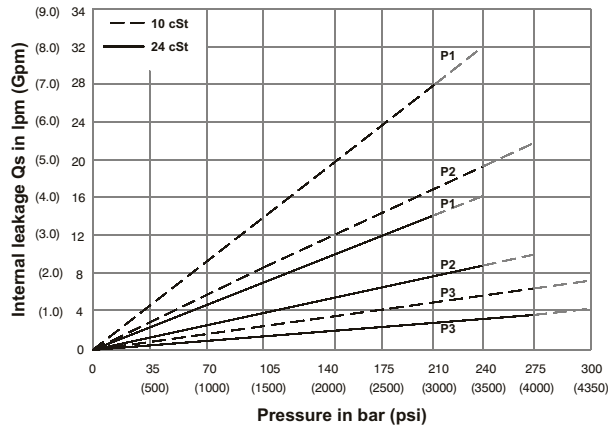


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50% of theoretical flow.
Total leakage is the sum of each section loss at its operating conditions.

NOISE LEVEL (TYPICAL)

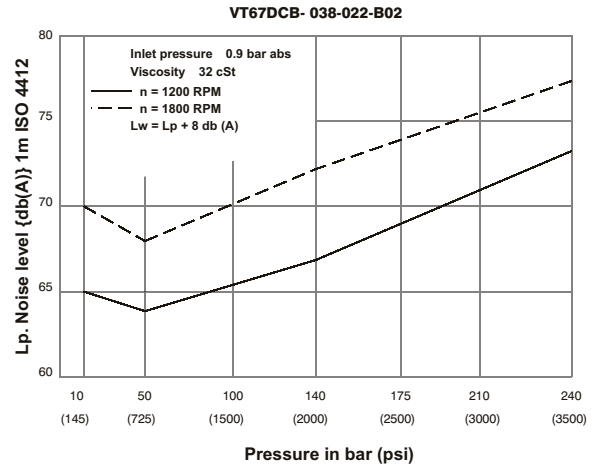


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECHANICAL POWER LOSS (TYPICAL)

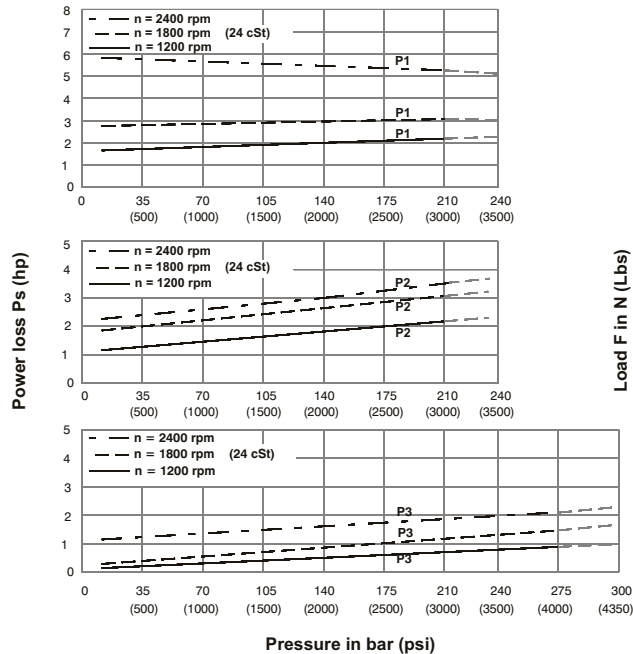


Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

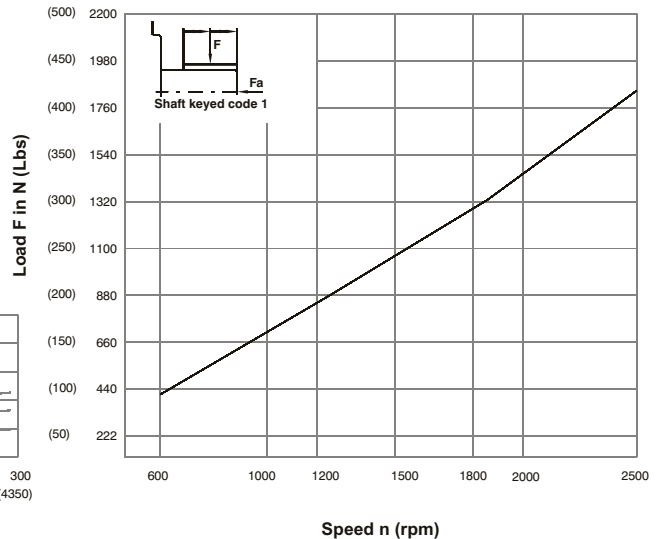

Maximum axial load permissible $F_a=800N$ (180 Lbs)

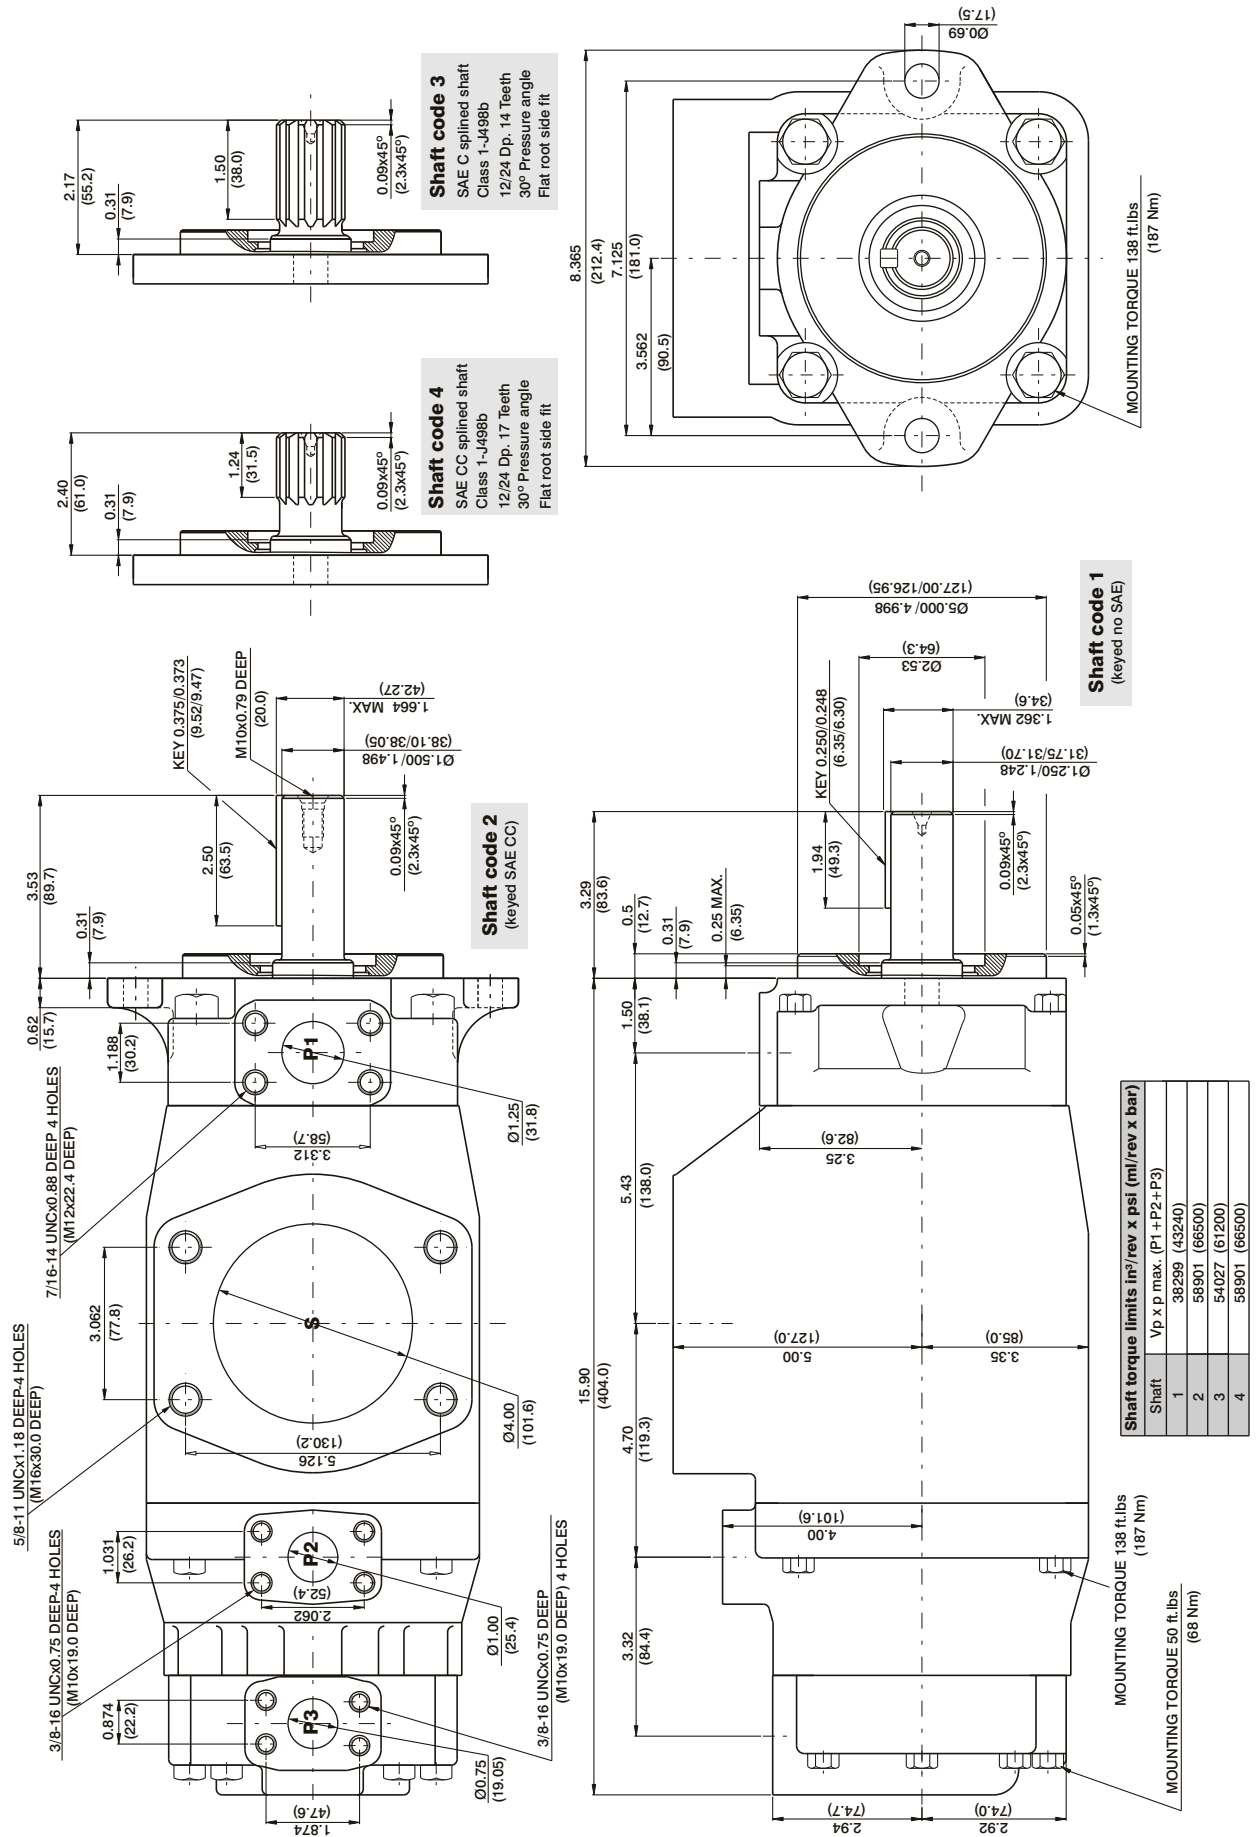

VT67EDC or T67EDCS

- 062 - B35 - 010 - 1 R 00 - A 1 - M1 - *

T67EDC Series-ISO 4 bolts 3019-2

Mounting flange 250 B4HW

T67EDCS Series - SAE E

Mounting flange J744c

Cam ring for "P1"

Volumetric displacement cm^3/rev (in^3/rev)

042 = 132.3 (8.07) 057 = 183.2 (11.18)

045 = 142.6 (8.70) 062 = 196.6 (12.00)

050 = 158.5 (9.67) 066 = 213.0 (13.00)

052 = 163.9 (10.00) 072 = 227.2 (13.86)

054 = 170.9 (10.43) 085 = 269.8 (16.40)

Cam ring for "P2"

Volumetric displacement cm^3/rev (in^3/rev)

B14 = 43.9 (2.68) B31 = 99.1 (6.05)

B17 = 55.0 (3.36) B35 = 113.4 (6.92)

B20 = 66.0 (4.03) B38 = 120.6 (7.36)

B22 = 70.3 (4.29) B42 = 137.5 (8.39)

B24 = 81.1 (4.95) 045 = 145.7 (8.89)

B28 = 89.9 (5.49) 050 = 158.0 (9.64)

Cam ring for "P3"

Volumetric displacement cm^3/rev (in^3/rev)

003 = 10.8 (0.66) 017 = 58.3 (3.56)

005 = 17.2 (1.05) 020 = 63.7 (3.89)

006 = 21.3 (1.30) 022 = 70.3 (4.29)

008 = 26.3 (1.61) 025 = 79.3 (4.84)

010 = 34.0 (2.08) 028 = 88.8 (5.42)

012 = 37.0 (2.26) 031 = 100 (6.10)

014 = 46.0 (2.81)

Modifications

Mounting w/connection variables

4 bolts SAE flanges J518

P1=1-1/2" P2=1-1/4" S=4"			
Type	P3	UNC	Metric
T67EDC	1"		M0
T67EDC	3/4"		M1
T67EDCS	1"	00	M0
T67EDCS	3/4"	01	M1

Seal class

1 = S1 (for minreal oil)

4 = S4 (for fire resistant fluids)

5 = S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4,5)

00 = Standard

Direction of rotation (view on the shaft)

R - Clockwise

L - Counter - clockwise

Type of Shaft T67EDC

1 - Keyed (G45N-ISO 3019-2)

Type of Shaft T67EDCS

2 - Keyed (SAE D&E)

3 - Splined (SAE D&E)

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)


Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1800 rpm						Input power p & n = 1800 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)	
		in^3/rev	cm^3/rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	042	8.07	132.3	62.92	239.1	60.37	229.4	58.52	222.4	8.09	6.03	78.44	58.49	133.80	99.8
	045	8.70	142.5	67.72	257.3	65.17	247.6	63.32	240.6	8.37	6.24	84.04	62.67	143.60	107.1
	050	9.67	158.5	75.38	286.3	72.83	276.8	70.98	269.7	8.82	6.58	92.97	69.30	159.24	118.8
	052	10.00	163.9	78.37	297.8	75.82	288.1	73.97	281.1	8.99	6.70	96.47	71.94	165.36	123.4
	054	10.43	170.9	81.27	308.8	78.72	299.1	76.87	292.1	9.17	6.84	99.75	74.40	177.46	132.4
	057	11.18	183.2	87.12	331.1	84.57	321.4	82.72	314.3	9.51	7.09	106.57	79.5	189.84	141.6
	062	12.00	196.7	93.54	355.5	90.99	345.8	89.14	338.7	9.88	7.37	114.17	85.2	196.34	146.5
	066	13.00	213.0	101.44	385.5	98.89	375.8	97.04	368.8	10.34	7.71	123.38	92.01	212.46	158.5
	072	13.86	227.1	108.00	410.4	105.45	400.7	103.60	393.7	10.72	8.00	131.04	97.8	225.86	168.5
	085 ¹⁾	16.40	268.7	127.79	485.6	126.13	479.3	--	--	11.88	8.86	101.66	75.8	--	--
P2				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)	
	B14	2.68	43.93	20.92	79.50	19.18	72.88	17.81	67.7	3.46	2.6	27.77	20.7	47.03	35.1
	B17	3.36	55.07	26.16	99.41	24.41	92.76	23.04	87.6	3.77	2.8	33.88	25.3	57.71	43.1
	B20	4.03	66.05	31.39	119.28	29.64	112.63	28.27	107.4	4.07	3.0	39.98	29.8	68.39	51.0
	B22	4.29	70.31	33.43	127.03	31.69	120.42	30.32	115.2	4.19	3.1	42.37	31.6	72.57	54.1
	B24	4.95	81.13	38.50	146.30	36.82	139.92	35.45	134.7	4.49	3.3	48.36	36.1	83.06	62.0
	B28	5.49	89.98	42.80	162.64	41.06	156.03	39.69	150.8	4.74	3.5	53.3	39.8	91.7	68.4
	B31	6.05	99.16	47.18	179.28	45.43	172.63	44.06	167.4	4.99	3.7	58.41	43.6	100.63	75.1
	B35	6.92	113.42	53.93	204.93	52.18	198.28	50.81	193.1	5.39	4.0	66.29	49.5	114.42	85.4
	B38	7.36	120.63	57.30	217.74	55.61	211.32	54.24	206.1	5.59	4.2	70.28	52.4	121.42	90.6
	B42 ²⁾	8.39	137.51	65.30	248.14	63.35	240.73	62.28	236.7	6.05	4.5	79.66	59.4	137.83	102.8
	045 ²⁾	8.89	145.71	69.20	262.96	67.11	255.02	65.31	248.2	6.74	5.0	83.75	62.5	145.79	108.8
	050 ^{2,3)}	9.64	158	75.14	285.53	72.96	277.2	71.78	272.8	7.08	5.3	90.58	67.6	134.5	100.3
P3				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 275 bar (4000 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 275 bar (4000 psi)	
	003	0.66	10.82	5.14	19.53	3.85	14.6	--	--	2.11	1.6	8.45	6.3	--	--
	005	1.05	17.21	8.18	31.08	6.89	26.2	5.68	21.6	2.29	1.7	12.0	9.0	19.81	14.8
	006	1.30	21.31	10.13	38.49	8.84	33.6	7.63	29.0	2.4	1.8	14.28	10.7	23.79	17.7
	008	1.61	26.39	12.55	47.69	11.26	42.8	10.05	38.2	2.54	1.9	17.11	12.8	28.75	21.4
	010	2.08	34.09	16.22	61.64	14.93	56.7	13.71	52.1	2.76	2.1	21.38	15.9	36.22	27.0
	012	2.26	37.04	17.64	67.03	16.35	62.1	15.14	57.5	2.84	2.1	23.05	17.2	39.14	29.2
	014	2.81	46.06	21.88	83.14	20.59	78.2	19.37	73.6	3.09	2.3	27.99	20.9	47.78	35.6
	017	3.56	58.35	27.73	105.37	26.44	100.5	25.22	95.8	3.43	2.6	34.81	26.0	59.73	44.6
	020	3.89	63.76	30.34	115.29	29.05	110.4	27.84	105.8	3.58	2.7	37.86	28.2	65.07	48.5
	022 ⁵⁾	4.29	70.31	33.43	127.03	32.14	122.1	30.93	117.5	3.76	2.8	41.47	30.9	71.38	53.2
	025 ^{4,6)}	4.84	79.33	37.71	143.30	36.42	138.4	35.21	133.8	4.01	3.0	46.46	34.7	80.12	59.8
	028 ^{4,7)}	5.42	88.83	42.23	160.47	40.94	155.6	40.32	153.2	4.27	3.2	51.74	38.6	76.73	57.2
	031 ^{4,7)}	6.10	99.98	47.56	180.73	46.27	175.8	45.65	173.5	4.58	3.4	57.95	43.2	86.06	64.2

-- We do not recommend to use this 003 at 275 bar (4000 psi) and 1500 rpm since internal leakage is over 50 % of theoretical flow.

1) 085 = 90 bar (1300 psi) max. int. 2) 042-045-050 = 2200 RPM max. 3) 050=210 bar (3000 psi) max. int.


4) 025-028-031 = 2500 R.P.M. max. 5) 022= 275 bar max. int. 6) 025 = 240 bar max. int. 7) 028-031 = 210 bar (3000 psi) max. int.

INTERNAL LEAKAGE (TYPICAL)

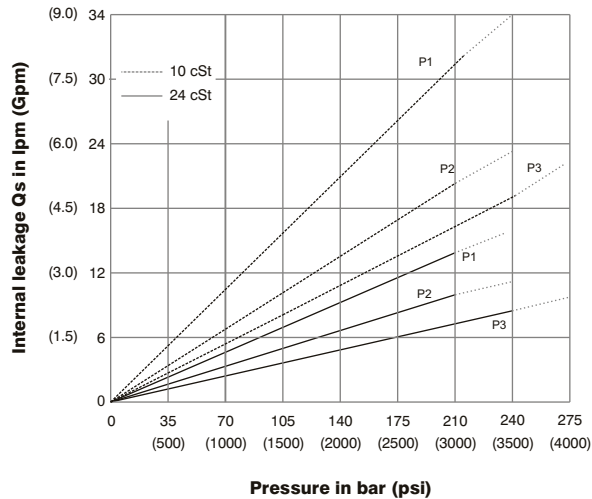


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50% of theoretical flow.
Total leakage is the sum of each section loss at its operating conditions.

NOISE LEVEL (TYPICAL) VT67EDCS- 062-B35-022

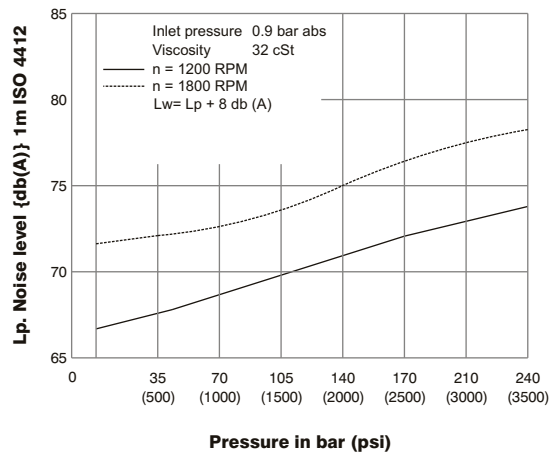


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECHANICAL POWER LOSS (TYPICAL)

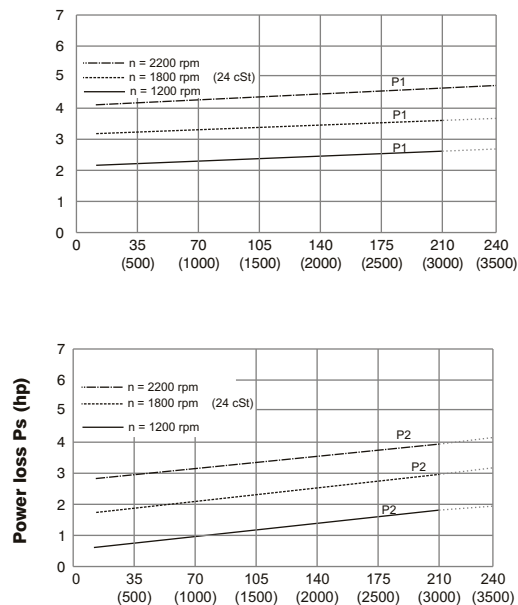

Total hydromechanical power loss is the sum of each section at its operating conditions

PERMISSIBLE RADIAL LOAD

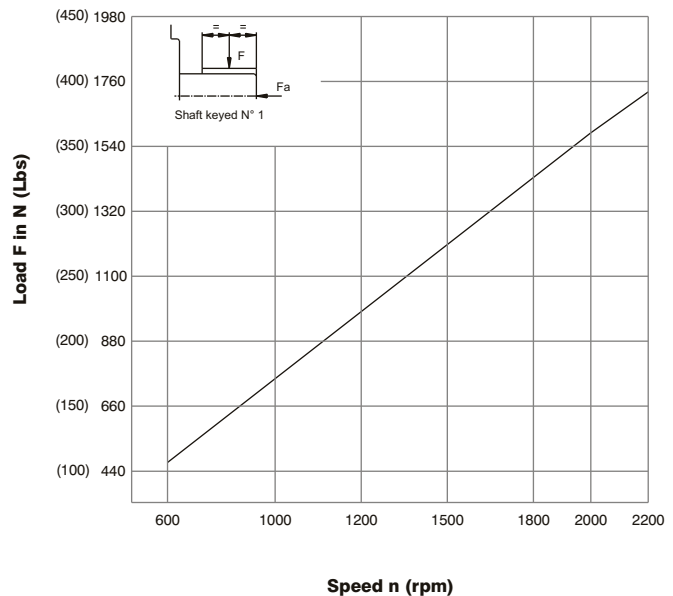


Maximum permissible axial load $F_a = 2000$ N (449 Lbs)

HIGH PERFORMANCE VANE PUMP VT67EDC OR VT67EDCS



TP

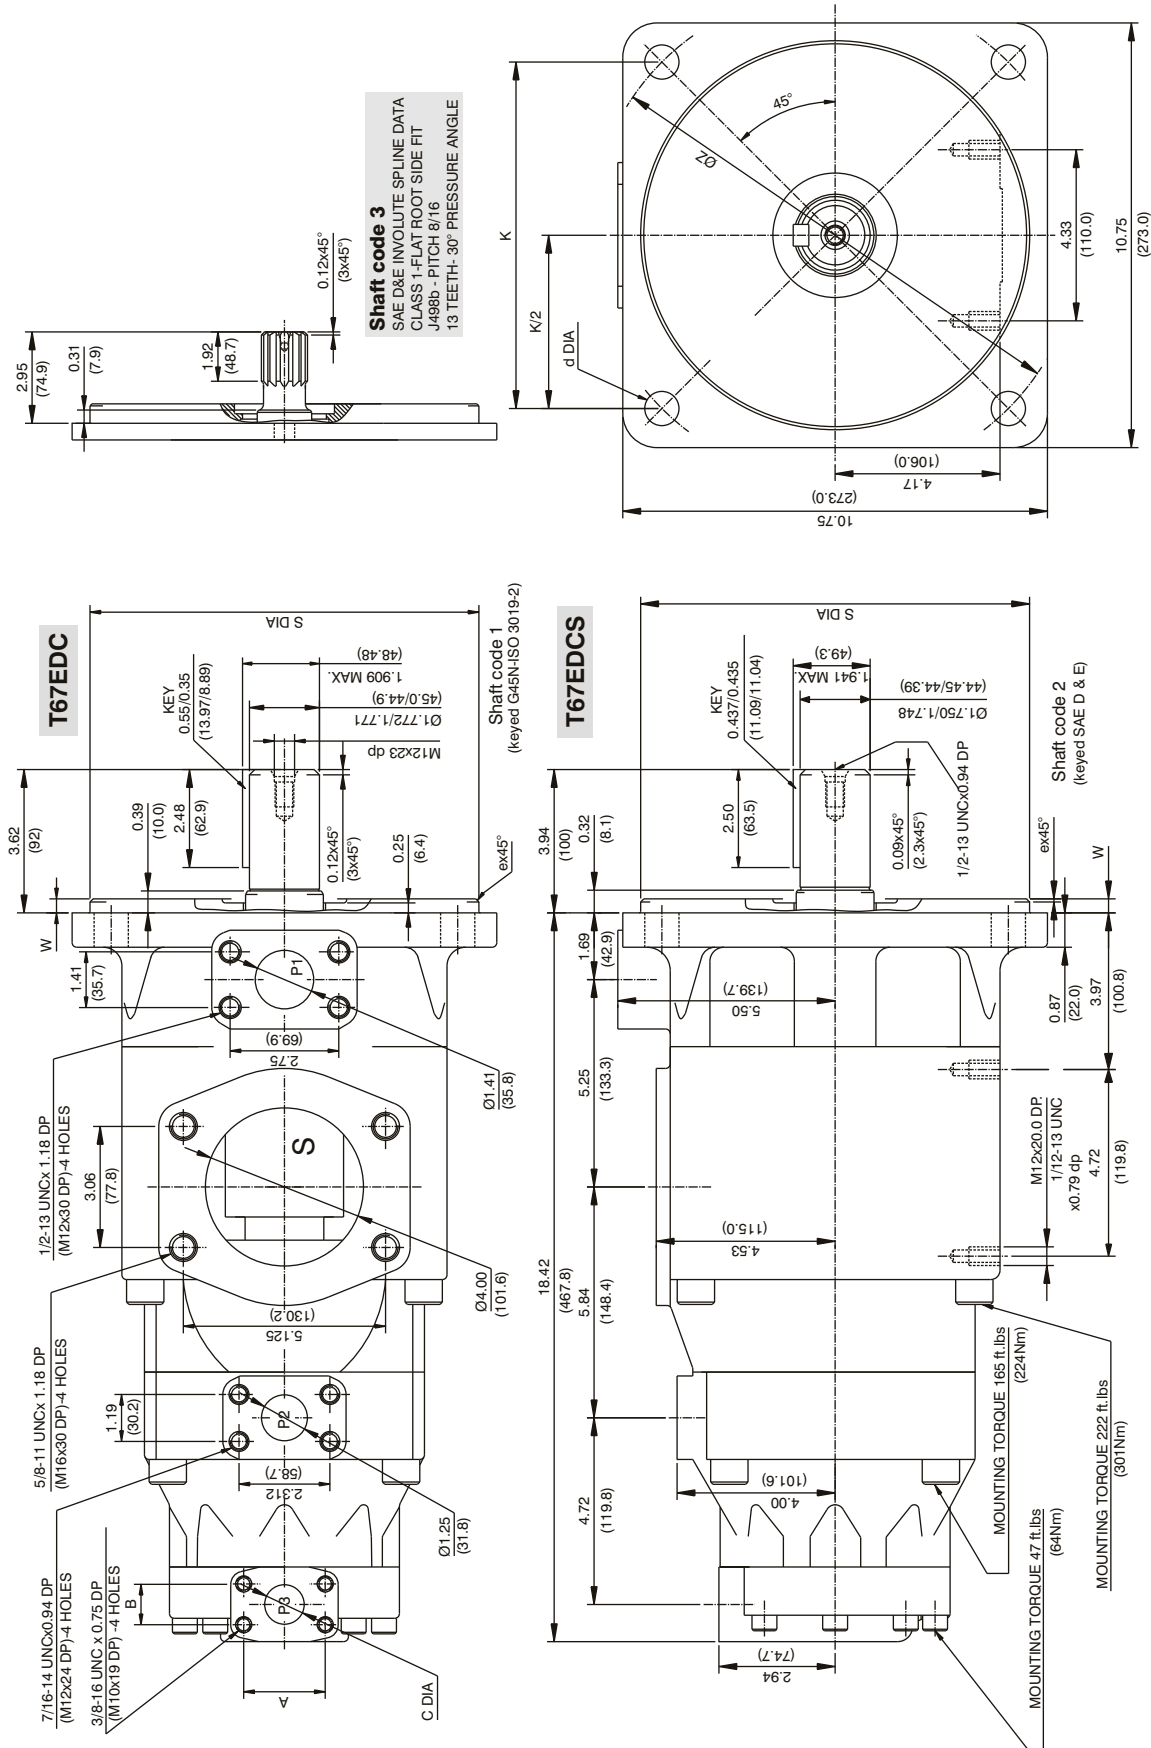

Alternate connect. variables		
	00 & M0	01 & M1
A	2.063(52.4)	1.874(47.5)
B	1.031(26.1)	0.874(22.1)
C	1.000(25.4)	0.748(18.9)

Alternate mounting flange					
Series	S Dia	W	K	Z Dia	d Dia
T67EDC	9.842(249.98)	0.079(2)	0.354(8.9)	12.401(314.9)	0.866(21.9)
T67EDCS	6.500(165.1)	0.079(2)	0.354(8.9)	8.838(224.4)	0.811(20.5)

Shaft torque limits in ³ /rev x psi (ml/rev x bar)	
Shaft	Vp x p max. (P1+P2+P3)
1	101506 (114715)
2	104818 (118457)
3	112312 (126927)